
ABAS preschool gate BS-16



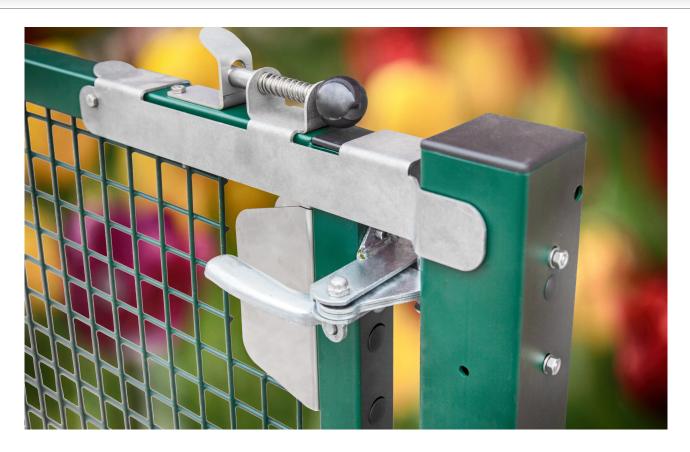

Description

ABAS Protect's preschool gate BS-16 consists of sturdy gate posts, a profile filled gate frame, and details. All-welded netting with 4 mm wire and mesh size 40 x 40 mm ensure adequate protection. Standard models are hot-dip galvanized and optionally powder coated in standard colors moss green, olive green or black.

The gate may be equipped with locks, as described below.

ABAS preschool gate BS-16 may be installed as a single walking gate or as a double drivinge gate. Double gates always include ground pin. Gate leaves are available in heights of 0.8 m, 1.0 m, 1.2 m and 1.5 m. Gate leaves can be combined to achieve clear openings from 1–4 m, in combinations with leaves of 1 m, 1.2 m, 1.5 m, and 2 m. See attached reference — note that casting dimensions depend on lock type!

Dimensions of the preschool gate are constructed with regard to the security of the children.

Locks: i) GL-4 and fitting lock can be used independently, or in combination. ii) Locinox kan be used independently, or in combination with two-handed lock.

Lock combinations

Lock	Independently	Combination
GL-4	Yes	Fitting lock
Fitting lock	Yes	GL-4
Locinox	Yes	Two-handed
Two-handed	No	Locinox






ABAS PROTECT AB Gislavedsvägen 3 514 93 Ambjörnarp Tel +46 (0)325 61 80 30 www.abas.se info@abas.se

2017-11-03



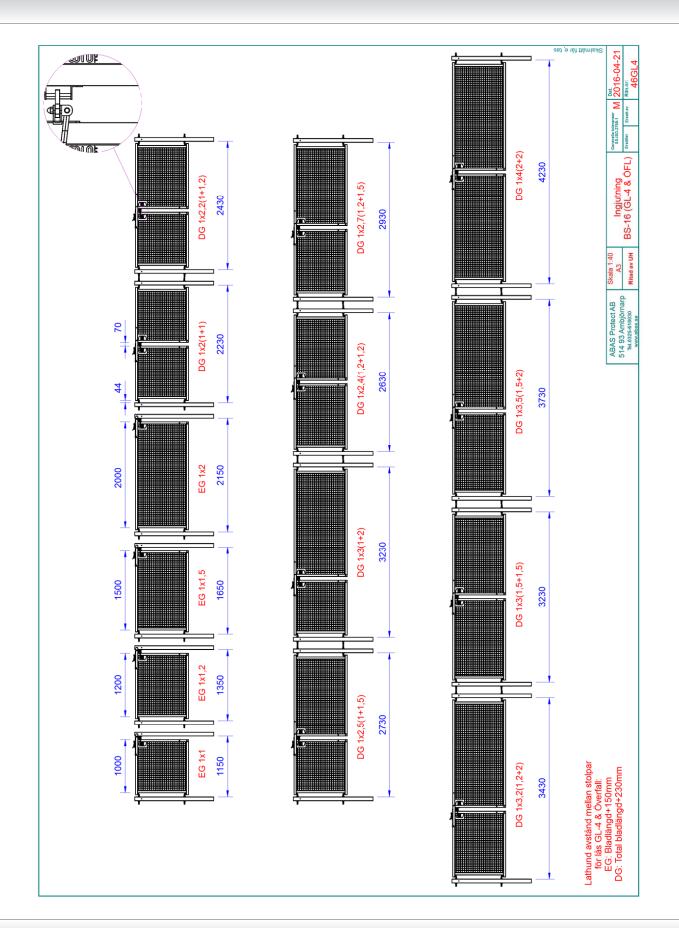




ABAS PROTECT AB Gislavedsvägen 3 514 93 Ambjörnarp Tel +46 (0)325 61 80 30 www.abas.se info@abas.se

2017-11-03



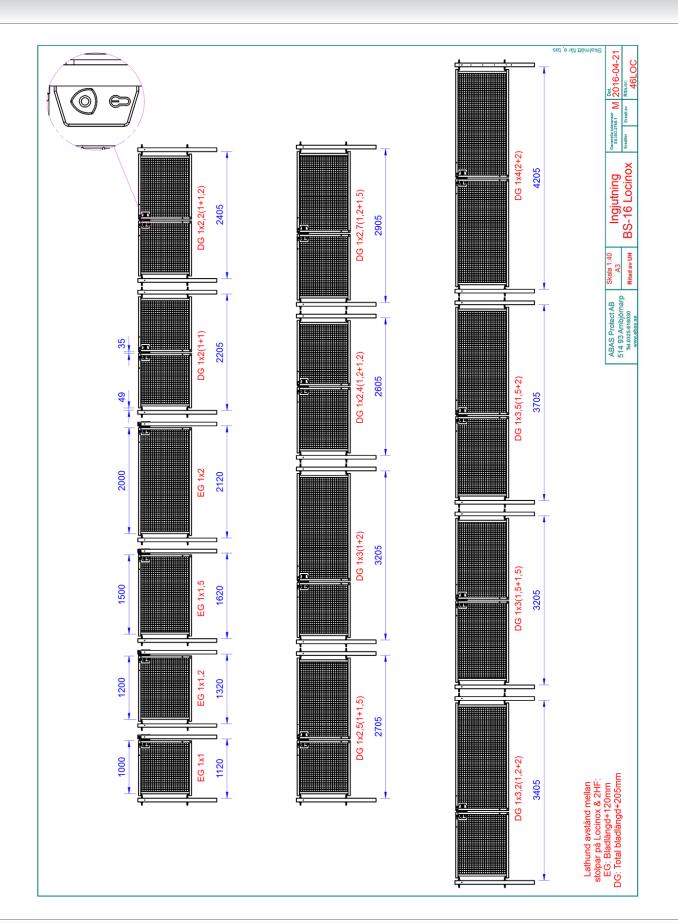



ABAS PROTECT AB Gislavedsvägen 3 514 93 Ambjörnarp Tel +46 (0)325 61 80 30 www.abas.se info@abas.se

2017-11-03